

LIQUIDYNE® 3-STAGE WA

FOR DREDGE PUMPS

The Liquidyne 3-Stage WA pump seal is used in pumps that process water containing a relatively large number of abrasive particles or particles larger than 100 micron. Lagersmit developed the Liquidyne 3-stage WA especially for pumps in which the pump water is heavily polluted.

ADVANTAGES

- Condition monitoring
- Low power consumption
- Maximised maintenance interval
- Hard Metal Layer (HML) coating for extra durable grooved bushes
- Settling pipe to optimise flushing medium
- Optional bronze edition to increase lifetime



> 100 MICRON

pH


6 < PH < 8



0 < T < 90°C



NO
RESTRICTION

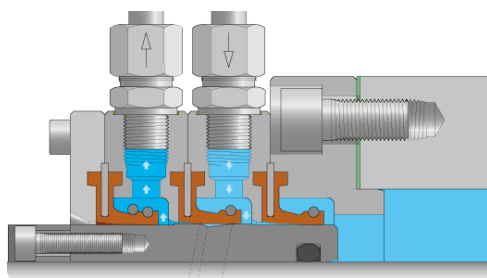


WATCH PRODUCT VIDEO

MATERIALS

- NBR lip seals
- Hastelloy® C4 springs
- Stainless steel housing parts
- Stainless steel grooved bush

[Contact us](#) for more information.

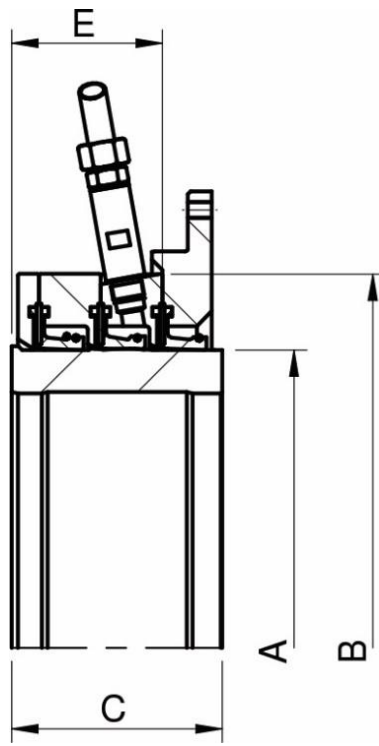

A	B	C	E
160	239	95/125	70/48
200	285	117	76
240	330	120	80
280	370	130	86
320	415	130	92
360	460	140	96
400	500	140	100
460	575	180	115
500	600	232,5	124,5
560	680	186	121