SUPREME® BULKHEAD SEAL

SAFE RETURN TO PORT

In the event of a major water leak, safety on board should always be a priority.
The Supreme Bulkhead seal is generally used to prevent flooding of the bulkhead seal's adjacent compartments in the unlikely event of an accident.



ADVANTAGES

- Seals off non-flooded compartments if flooding occurs
- Ensures a safe return to port
- Allows large radial (5 mm) and axial (30 mm) play
- Can be used for low- and high-speed shafts


MATERIALS

- Supreme lip seals
- Aluminum housing parts

Contact us for more information.

T +31 88 0216 200
info@lagersmit.com
www.lagersmit.com

LAGERSMIT
THE ORIGIN OF SEALING SOLUTIONS

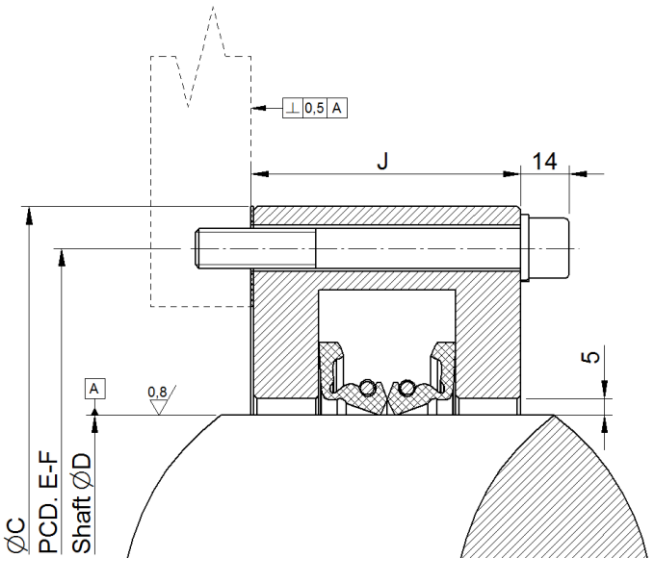

T	D	C	E	F	J
110	95 – 110	235	210	6x M12 x 100	81
125	111 – 125	250	225	6x M12 x 100	81
140	126 – 140	265	240	6x M12 x 100	81
155	141 – 155	280	255	6x M12 x 100	81
170	156 – 170	295	270	8x M12 x 100	81
190	171– 190	315	290	8x M12 x 100	81
200	191 – 200	325	300	8x M12 x 100	81
220	201 – 220	345	320	8x M12 x 100	81
240	221 – 240	365	340	12x M12 x 100	81
260	241 – 260	385	360	12x M12 x 100	81
280	261 – 280	405	380	12x M12 x 100	81
300	281 – 300	425	400	12x M12 x 100	81
330	301 – 330	455	430	12x M12 x 100	81

SIZE	D	C	E	F	J
355	331 – 355	480	455	12x M12 x 100	81
380	356 – 380	505	480	12x M12 x 100	81
400	381 – 400	525	500	12x M12 x 100	81
420	401 – 420	545	520	12x M12 x 100	81
450	421 – 450	575	550	12x M12 x 100	81
480	451 – 480	605	580	12x M12 x 100	81
500	481 – 500	625	600	12x M12 x 100	81
530	501 – 530	655	630	12x M12 x 100	81
560	531 – 560	685	660	12x M12 x 100	81
600	561 – 600	725	700	12x M12 x 100	81
630	601 – 630	755	730	16x M12 x 100	81
670	631 – 670	795	770	16x M12 x 100	81
710	671 – 710	835	810	16x M12 x 100	81

Despite the constant care and attention, we pay to the composition of this document, no rights can be derived from the contents. We accept no liability for any errors and / or omissions in the content of the document.

LAGERSMIT
THE ORIGIN OF SEALING SOLUTIONS