
SUPREME SEAGUARD VENTUS®

ZERO EMISSIONS OF OIL, EXTRA SAFETY AGAINST LEAKAGE

Supreme SeaGuard Ventus® combines extra security against oil leakage from the Supreme SeaGuard® with guaranteed zero emissions of the Supreme Ventus®. This powerful combination of seals is the most chosen option for retrofits.


The Supreme SeaGuard Ventus (SGV) has an extra oil-repellent lip seal that can be activated in the event of excessive oil leakage. In this way, an unnecessary dry dock can be prevented and maintenance can be postponed safely.

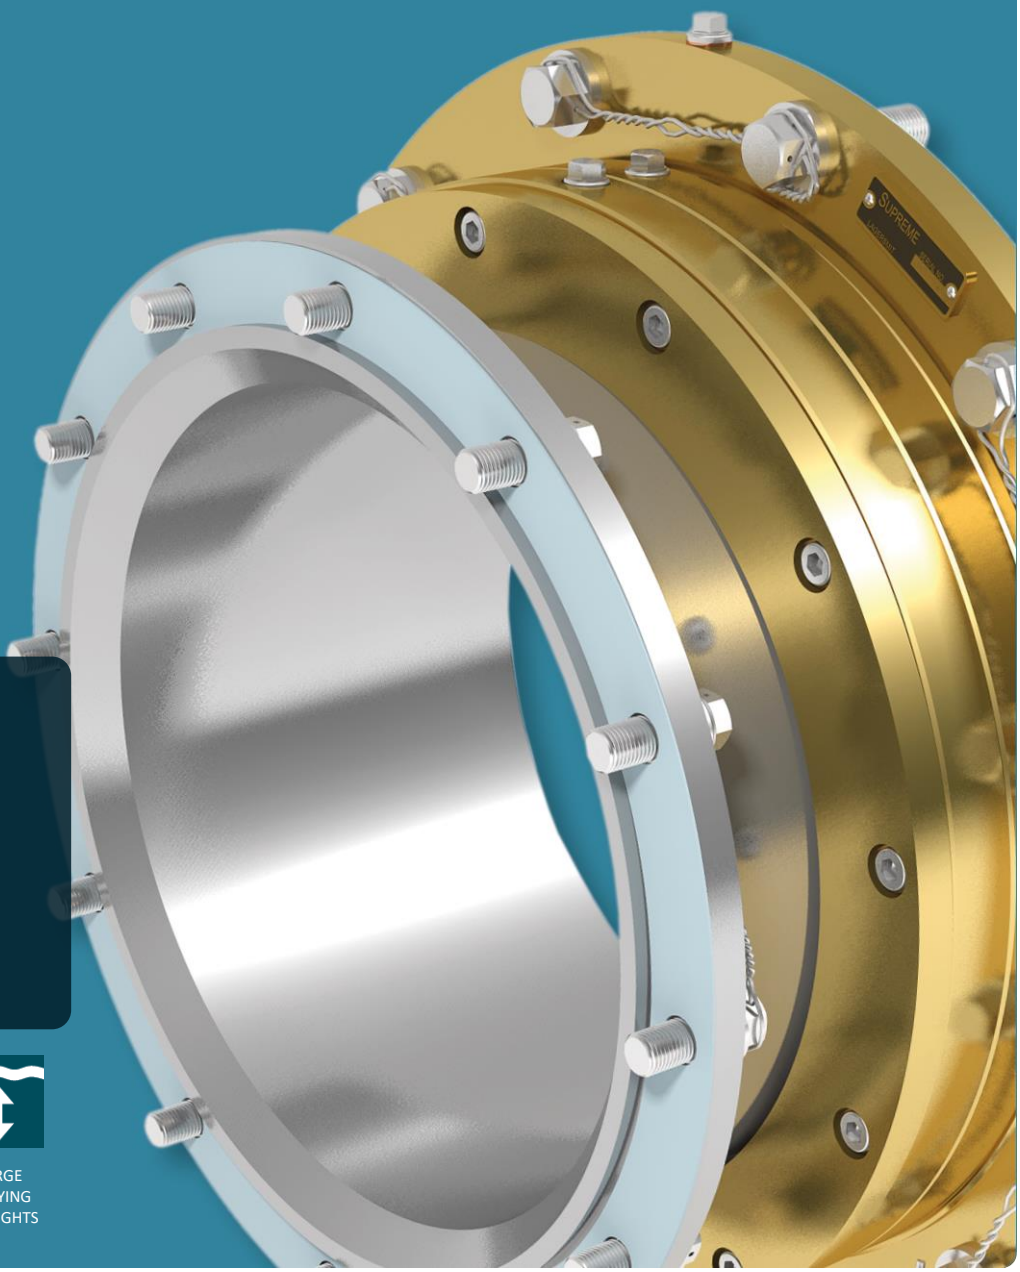

ADVANTAGES

- Avoid the use of expensive bio-oils
- Extra safety against oil leakage
- Complies with the VGP and VIDA regulations
- Safely postpone maintenance
- 24/7 condition monitoring
- Zero emissions of oil
- Low Cost of Ownership

REDUNDANT LIP SEAL | VGP COMPLIANT | CONDITION MONITORING | LARGE VARYING DRAUGHTS

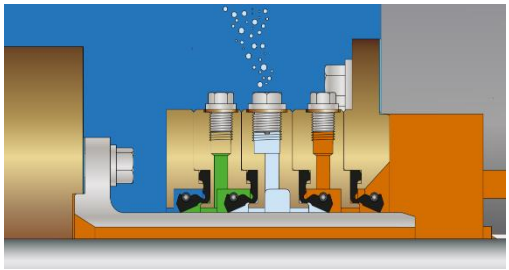


MATERIALS


- NBR/FKM/FKM-EAL lip seals
- Bronze housing parts
- Stainless steel liner
- Supreme Ventus air release valve
- Optional: Hastelloy® C4 springs
- Optional: 80 liter air tight lube oil tank

Type approvals from the major classification societies are available here.
Curious about all customized options? Take a look at the overview for all possibilities!

T +31 88 0216 200
info@lagersmit.com
www.lagersmit.com

LAGERSMIT
THE ORIGIN OF SEALING SOLUTIONS

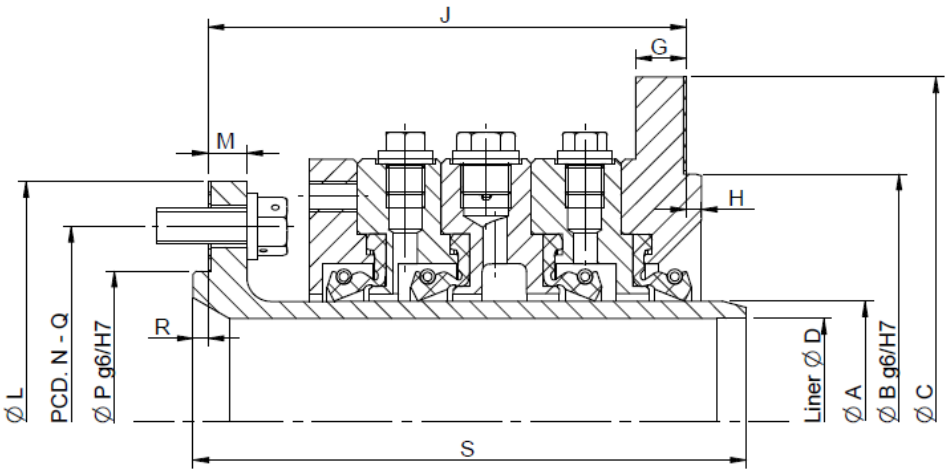

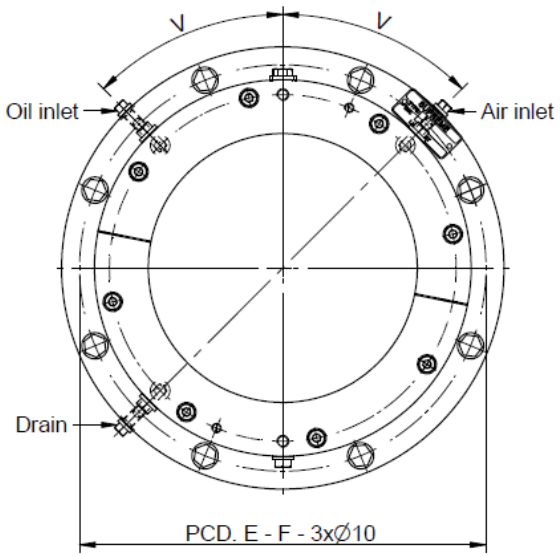

A	D	B	C	E	F	G	H	J	L	M	N	Q	P	R	S	V
140	116 – 130	225	290	260	8x M12 x 40	17	5	160	195	11	175	8x M8 x 20	150	5	176	45°
155	131 – 145	240	305	275	8x M12 x 40	17	5	160	214	11	194	8x M8 x 20	175	5	185	45°
170	146 – 160	255	320	290	8x M12 x 40	17	5	160	240	11	220	8x M8 x 20	200	5	185	45°
190	161 – 180	275	340	310	8x M12 x 40	17	5	160	270	13	240	8x M12 x 30	214	5	185	45°
200	181 – 190	285	350	320	8x M12 x 40	17	5	160	280	13	250	8x M12 x 30	224	5	185	45°
220	191 – 208	305	370	340	8x M12 x 40	17	5	160	300	13	270	8x M12 x 30	240	5	185	45°
240	209 – 228	345	425	390	12x M16 x 55	17	5	170	320	13	290	8x M12 x 30	260	5	195	30°
260	229 – 248	365	445	410	12x M16 x 55	17	5	175	340	16	310	8x M12 x 30	284	5	200	30°
280	249 – 264	385	465	430	12x M16 x 55	17	5	175	360	16	330	12x M12 x 30	300	5	200	30°
300	265 – 284	405	485	450	12x M16 x 55	17	5	175	375	16	346	12x M12 x 30	320	5	200	30°
330	285 – 314	435	515	480	12x M16 x 55	17	5	175	425	16	390	12x M12 x 30	360	6	200	30°
355	315 – 337	475	565	525	12x M20 x 60	19	5	195	450	16	416	12x M16 x 35	384	6	220	30°
380	338 - 362	500	590	550	12x M20 x 60	19	5	195	480	16	440	12x M16 x 35	406	6	220	30°

Despite the constant care and attention, we pay to the composition of this document, no rights can be derived from the contents. We accept no liability for any errors and / or omissions in the content of the document.

LAGERSMIT
THE ORIGIN OF SEALING SOLUTIONS

A	D	B	C	E	F	G	H	J	L	M	N	Q	P	R	S	V
400	363 - 381	520	610	570	12x M20 x 60	19	5	200	500	21	460	12x M16 x 35	424	6	225	30°
420	382 - 400	540	630	590	12x M20 x 60	19	5	200	520	21	486	12x M16 x 40	450	6	225	30°
450	401 – 428	575	675	630	12x M20 x 60	19	5	225	550	21	510	12x M16 x 40	476	7	250	22,5°
480	429 – 457	605	705	660	12x M20 x 60	22	5	225	590	21	550	12x M20 x 45	510	7	250	22,5°
500	458 – 476	625	725	680	12x M20 x 60	22	5	225	600	21	560	12x M20 x 45	526	7	250	22,5°
530	477 – 504	655	755	710	12x M20 x 60	22	5	225	630	21	590	12x M20 x 45	550	7	250	22,5°
560	505 – 532	700	820	765	12x M24 x 75	24	5	240	675	21	630	12x M20 x 45	588	8	262	22,5°
600	533 – 570	740	860	805	12x M24 x 75	24	5	240	700	21	660	12x M20 x 45	620	8	262	22,5°
630	571 – 598	770	890	835	12x M24 x 75	24	5	245	760	26	710	12x M24 x 55	670	8	268	22,5°
670	599 – 635	810	930	875	12x M24 x 75	24	5	245	820	26	750	12x M24 x 55	710	9	268	22,5°
710	636 – 672	865	990	930	16x M24 x 75	26	5	280	840	26	790	12x M24 x 55	740	9	310	22,5°
750	673 – 710	905	1030	970	16x M24 x 75	26	5	280	885	26	836	16x M24 x 55	780	9	311	22,5°
800	711 – 750	960	1090	1030	20x M24 x 75	26	5	310	945	31	890	16x M24 x 55	825	9	348	22,5°
850	751 – 795	1010	1140	1080	20x M24 x 75	26	5	310	1000	31	950	16x M24 x 55	870	9	348	22,5°
900	796 – 840	1065	1200	1135	20x M24 x 75	36	7	330	1070	31	1010	16x M24 x 55	920	9	361	22,5°
950	841 – 890	1115	1250	1185	20x M24 x 75	36	7	330	1130	31	1070	16x M24 x 55	970	9	361	22,5°

Despite the constant care and attention, we pay to the composition of this document, no rights can be derived from the contents. We accept no liability for any errors and / or omissions in the content of the document.

LAGERSMIT
THE ORIGIN OF SEALING SOLUTIONS