
SUPREME SEAGUARD®

EXTRA SAFETY AGAINST OIL LEAKAGE

The Supreme SeaGuard gives you extra security against oil leakage into the marine environment. This seal is usually applied on a Seagoing vessel with a conventional (CPP or FPP) propulsion system.

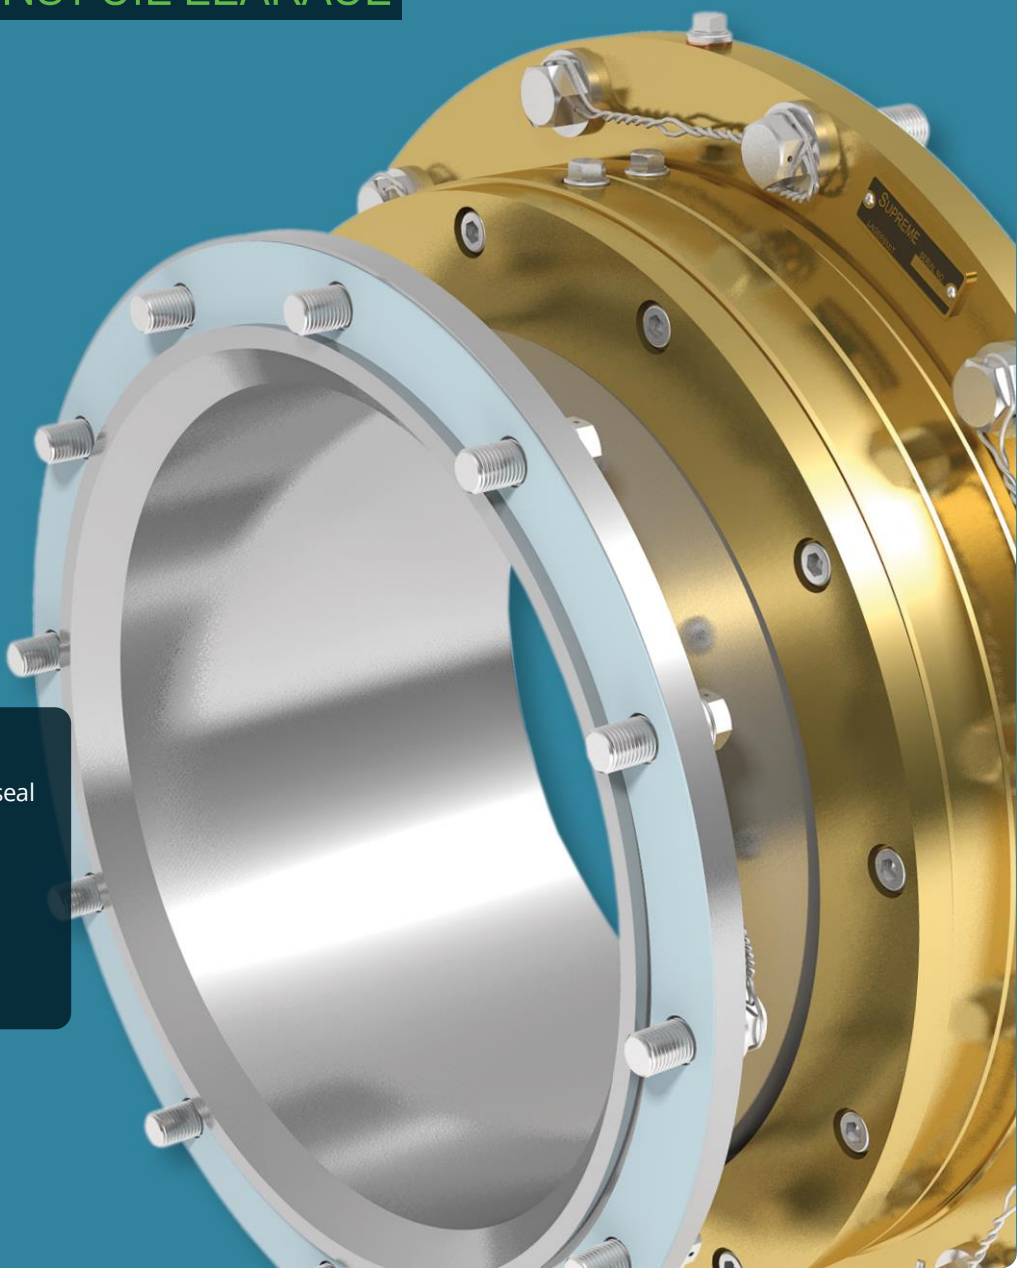


ADVANTAGES

- Extra safety due to its redundant lip seal
- Effective separation of water and lubricants
- Available in split type
- Modular, Made-to-Measure

MODULAR DESIGN

SPLIT TYPE OPTIONAL

REDUNDANT LIP SEAL

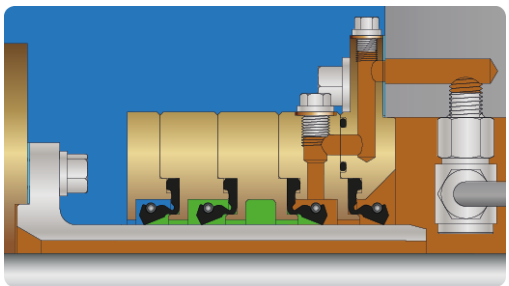


MATERIALS

- NBR/FKM/FKM-EAL lip seals
- Bronze housing parts
- Stainless steel liner
- Hard Metal wear Layer (HML)

Type approvals from the major classification societies are available here. Curious about all customized options? Take a look at the overview for all possibilities!

T +31 88 0216 200
info@lagersmit.com
www.lagersmit.com

LAGERSMIT
THE ORIGIN OF SEALING SOLUTIONS

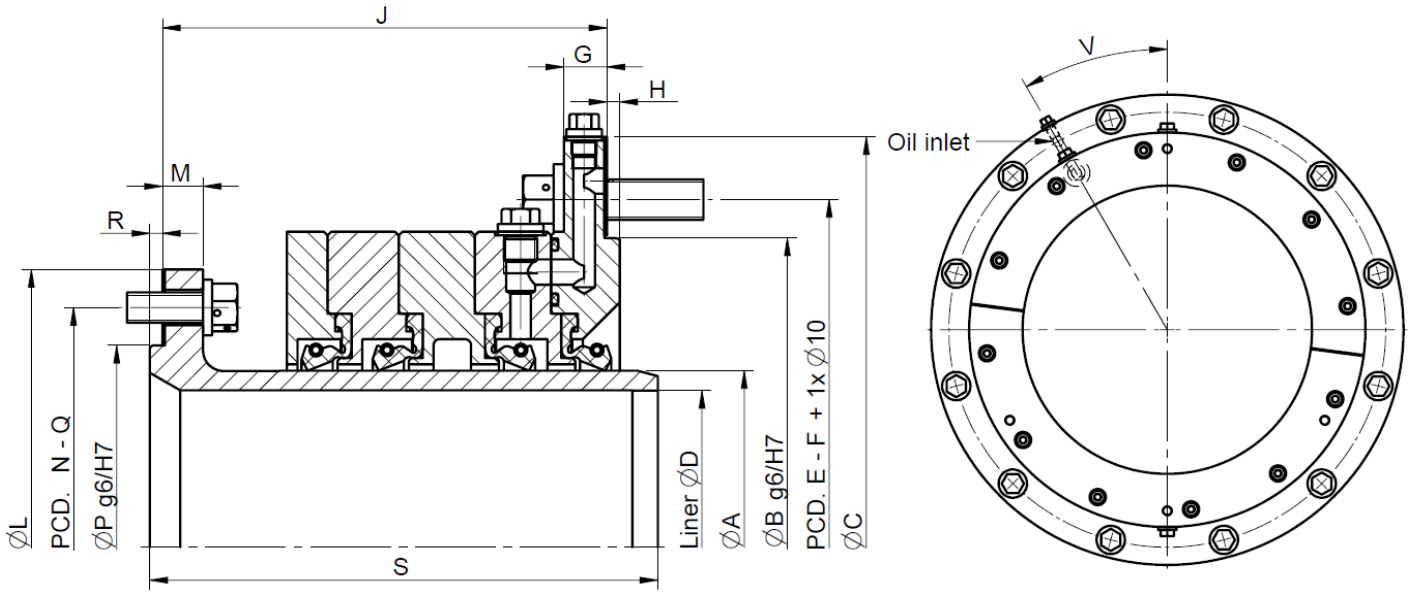

A	D	B	C	E	F	G	H	J	L	M	N	Q	P	R	S	V
140	116 – 130	225	290	260	8x M12 x 40	17	5	160	195	11	175	8x M8 x 20	150	5	176	45°
155	131 – 145	240	305	275	8x M12 x 40	17	5	160	214	11	194	8x M8 x 20	175	5	185	45°
170	146 – 160	255	320	290	8x M12 x 40	17	5	160	240	11	220	8x M8 x 20	200	5	185	45°
190	161 – 180	275	340	310	8x M12 x 40	17	5	160	270	13	240	8x M12 x 30	214	5	185	45°
200	181 – 190	285	350	320	8x M12 x 40	17	5	160	280	13	250	8x M12 x 30	224	5	185	45°
220	191 – 208	305	370	340	8x M12 x 40	17	5	160	300	13	270	8x M12 x 30	240	5	185	45°
240	209 – 228	345	425	390	12x M16 x 55	17	5	170	320	13	290	8x M12 x 30	260	5	195	30°
260	229 – 248	365	445	410	12x M16 x 55	17	5	175	340	16	310	8x M12 x 30	284	5	200	30°
280	249 – 264	385	465	430	12x M16 x 55	17	5	175	360	16	330	12x M12 x 30	300	5	200	30°
300	265 – 284	405	485	450	12x M16 x 55	17	5	175	375	16	346	12x M12 x 30	320	5	200	30°
330	285 – 314	435	515	480	12x M16 x 55	17	5	175	425	16	390	12x M12 x 30	360	6	200	30°
355	315 – 337	475	565	525	12x M20 x 60	19	5	195	450	16	416	12x M16 x 35	384	6	220	30°
380	338 - 362	500	590	550	12x M20 x 60	19	5	195	480	16	440	12x M16 x 35	406	6	220	30°

Despite the constant care and attention, we pay to the composition of this document, no rights can be derived from the contents. We accept no liability for any errors and / or omissions in the content of the document.

LAGERSMIT
THE ORIGIN OF SEALING SOLUTIONS

A	D	B	C	E	F	G	H	J	L	M	N	Q	P	R	S	V
400	363 - 381	520	610	570	12x M20 x 60	19	5	200	500	21	460	12x M16 x 35	424	6	225	30°
420	382 - 400	540	630	590	12x M20 x 60	19	5	200	520	21	486	12x M16 x 40	450	6	225	30°
450	401 – 428	575	675	630	12x M20 x 60	19	5	225	550	21	510	12x M16 x 40	476	7	250	22,5°
480	429 – 457	605	705	660	12x M20 x 60	22	5	225	590	21	550	12x M20 x 45	510	7	250	22,5°
500	458 – 476	625	725	680	12x M20 x 60	22	5	225	600	21	560	12x M20 x 45	526	7	250	22,5°
530	477 – 504	655	755	710	12x M20 x 60	22	5	225	630	21	590	12x M20 x 45	550	7	250	22,5°
560	505 – 532	700	820	765	12x M24 x 75	24	5	240	675	21	630	12x M20 x 45	588	8	262	22,5°
600	533 – 570	740	860	805	12x M24 x 75	24	5	240	700	21	660	12x M20 x 45	620	8	262	22,5°
630	571 – 598	770	890	835	12x M24 x 75	24	5	245	760	26	710	12x M24 x 55	670	8	268	22,5°
670	599 – 635	810	930	875	12x M24 x 75	24	5	245	820	26	750	12x M24 x 55	710	9	268	22,5°
710	636 – 672	865	990	930	16x M24 x 75	26	5	280	840	26	790	12x M24 x 55	740	9	310	22,5°
750	673 – 710	905	1030	970	16x M24 x 75	26	5	280	885	26	836	16x M24 x 55	780	9	311	22,5°
800	711 – 750	960	1090	1030	20x M24 x 75	26	5	310	945	31	890	16x M24 x 55	825	9	348	22,5°
850	751 – 795	1010	1140	1080	20x M24 x 75	26	5	310	1000	31	950	16x M24 x 55	870	9	348	22,5°
900	796 – 840	1065	1200	1135	20x M24 x 75	36	7	330	1070	31	1020	16x M24 x 55	920	9	361	22,5°
950	841 – 890	1115	1250	1185	20x M24 x 75	36	7	330	1130	31	1070	16x M24 x 55	970	9	361	22,5°

Despite the constant care and attention, we pay to the composition of this document, no rights can be derived from the contents. We accept no liability for any errors and / or omissions in the content of the document.

LAGERSMIT
THE ORIGIN OF SEALING SOLUTIONS