
SUPREME® TS4

EXTRA SAFETY PREVENTING WATER INGRESS

The Supreme TS4 is a targeted design for azimuth and azipull thrusters that have to deal with heavy-duty operations. It provides extra safety for your thruster against water ingress and is custom-made for every application.

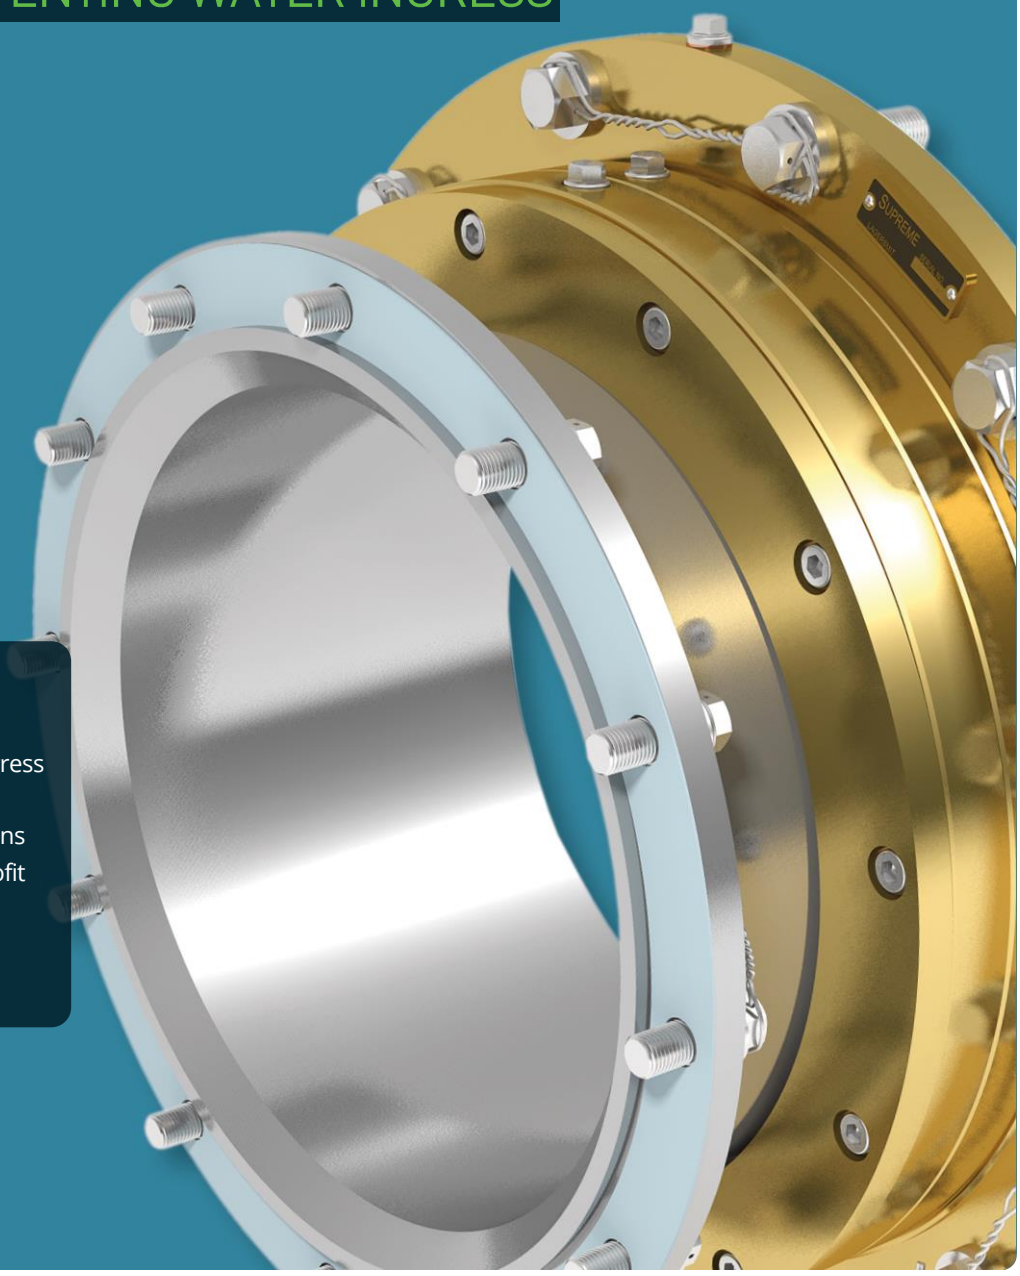


ADVANTAGES

- Special thruster design
- Safety measure preventing water ingress
- Condition monitoring
- Available with a broad range of options
- Suitable for both new-build and retrofit applications

MODULAR DESIGN

SPECIAL THRUSTER DESIGN

REDUNDANT LIP SEAL

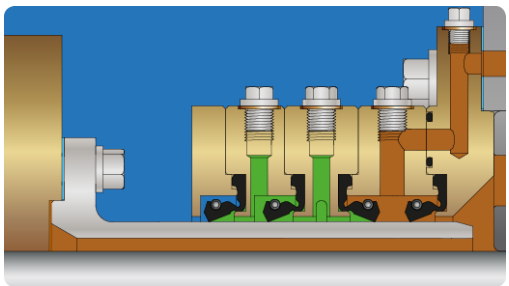

MATERIALS


- NBR/FKM/FKM-EAL lip seals
- Bronze housing parts
- Stainless steel liner

Type approvals from the major classification societies are available here. Curious about all customized options? Take a look at the overview for all possibilities!

Optional: Supreme TS4 Ventus!

T +31 88 0216 200
info@lagersmit.com
www.lagersmit.com

LAGERSMIT
THE ORIGIN OF SEALING SOLUTIONS

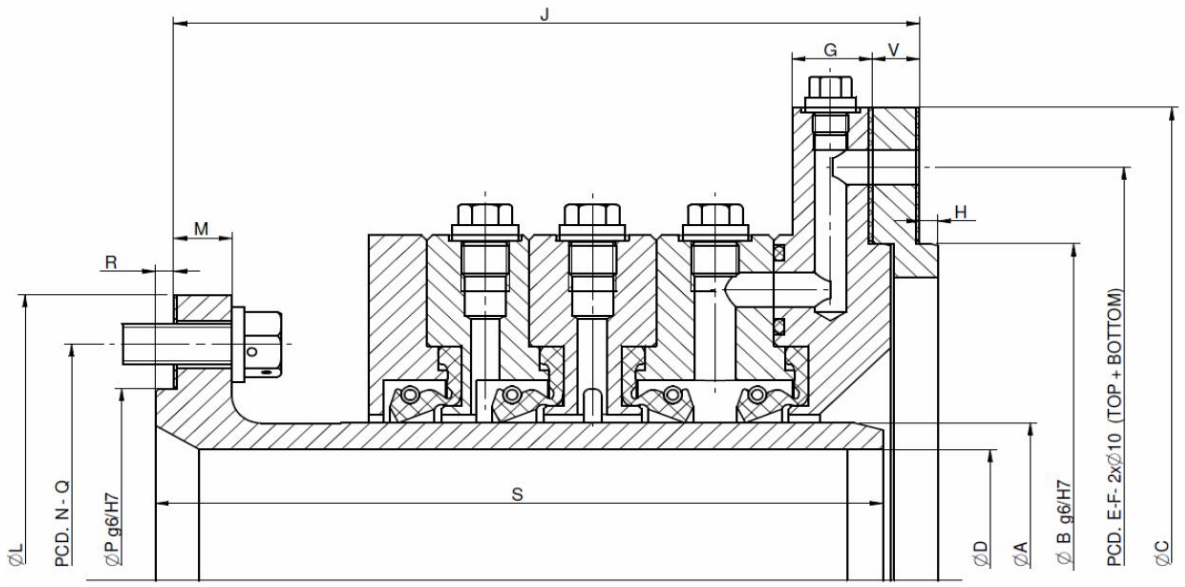

A	D	B	C	E	F	G	H	J	L	M	N	Q	P	R	S
155	145	240	305	275	8x M12 x 40	17	5	160	214	11	194	8x M8 x 20	175	5	185
170	160	255	320	290	8x M12 x 40	17	5	160	240	11	220	8x M8 x 20	200	5	185
190	180	275	340	310	8x M12 x 40	17	5	160	270	13	240	8x M12 x 30	214	5	185
200	190	285	350	320	8x M12 x 40	17	5	160	280	13	250	8x M12 x 30	224	5	185
220	208	305	370	340	8x M12 x 40	17	5	160	300	13	270	8x M12 x 30	240	5	185
240	228	345	425	390	12x M16 x 55	17	5	170	320	13	290	8x M12 x 30	260	5	195
260	248	365	445	410	12x M16 x 55	17	5	175	340	16	310	8x M12 x 30	284	5	200
280	264	385	465	430	12x M16 x 55	17	5	175	360	16	330	12x M12 x 30	300	5	200
300	284	405	485	450	12x M16 x 55	17	5	175	375	16	346	12x M12 x 30	320	5	200
330	314	435	515	480	12x M16 x 55	17	5	175	425	16	390	12x M12 x 30	360	6	200
355	337	475	565	525	12x M20 x 60	19	5	195	450	16	416	12x M16 x 35	384	6	220
380	362	500	590	550	12x M20 x 60	19	5	195	480	16	440	12x M16 x 35	406	6	220

Despite the constant care and attention, we pay to the composition of this document, no rights can be derived from the contents. We accept no liability for any errors and / or omissions in the content of the document

LAGERSMIT
THE ORIGIN OF SEALING SOLUTIONS

A	D	B	C	E	F	G	H	J	L	M	N	Q	P	R	S
400	381	520	610	570	12x M20 x 60	19	5	200	500	21	460	12x M16 x 35	424	6	225
420	400	540	630	590	12x M20 x 60	19	5	200	520	21	486	12x M16 x 40	450	6	225
450	428	575	675	630	12x M20 x 60	19	5	225	550	21	510	12x M16 x 40	476	7	250
480	457	605	705	660	12x M20 x 60	22	5	225	590	21	550	12x M20 x 45	510	7	250
500	476	625	725	680	12x M20 x 60	22	5	225	600	21	560	12x M20 x 45	526	7	250
530	504	655	755	710	12x M20 x 60	22	5	225	630	21	590	12x M20 x 45	550	7	250
560	532	700	820	765	12x M24 x 75	24	5	240	675	21	630	12x M20 x 45	588	8	262
600	570	740	860	805	12x M24 x 75	24	5	240	700	21	660	12x M20 x 45	620	8	262
630	598	770	890	835	12x M24 x 75	24	5	245	760	26	710	12x M24 x 55	670	8	268
670	635	810	930	875	12x M24 x 75	24	5	245	820	26	750	12x M24 x 55	710	9	268
710	672	865	990	930	16x M24 x 75	26	5	280	840	26	790	12x M24 x 55	740	9	310
750	710	905	1030	970	16x M24 x 75	26	5	280	885	26	836	16x M24 x 55	780	9	311
800	750	960	1090	1030	20x M24 x 75	26	5	310	945	31	890	16x M24 x 55	825	9	348
850	795	1010	1140	1080	20x M24 x 75	26	5	310	1000	31	950	16x M24 x 55	870	9	348

Despite the constant care and attention, we pay to the composition of this document, no rights can be derived from the contents. We accept no liability for any errors and / or omissions in the content of the document

LAGERSMIT
THE ORIGIN OF SEALING SOLUTIONS